


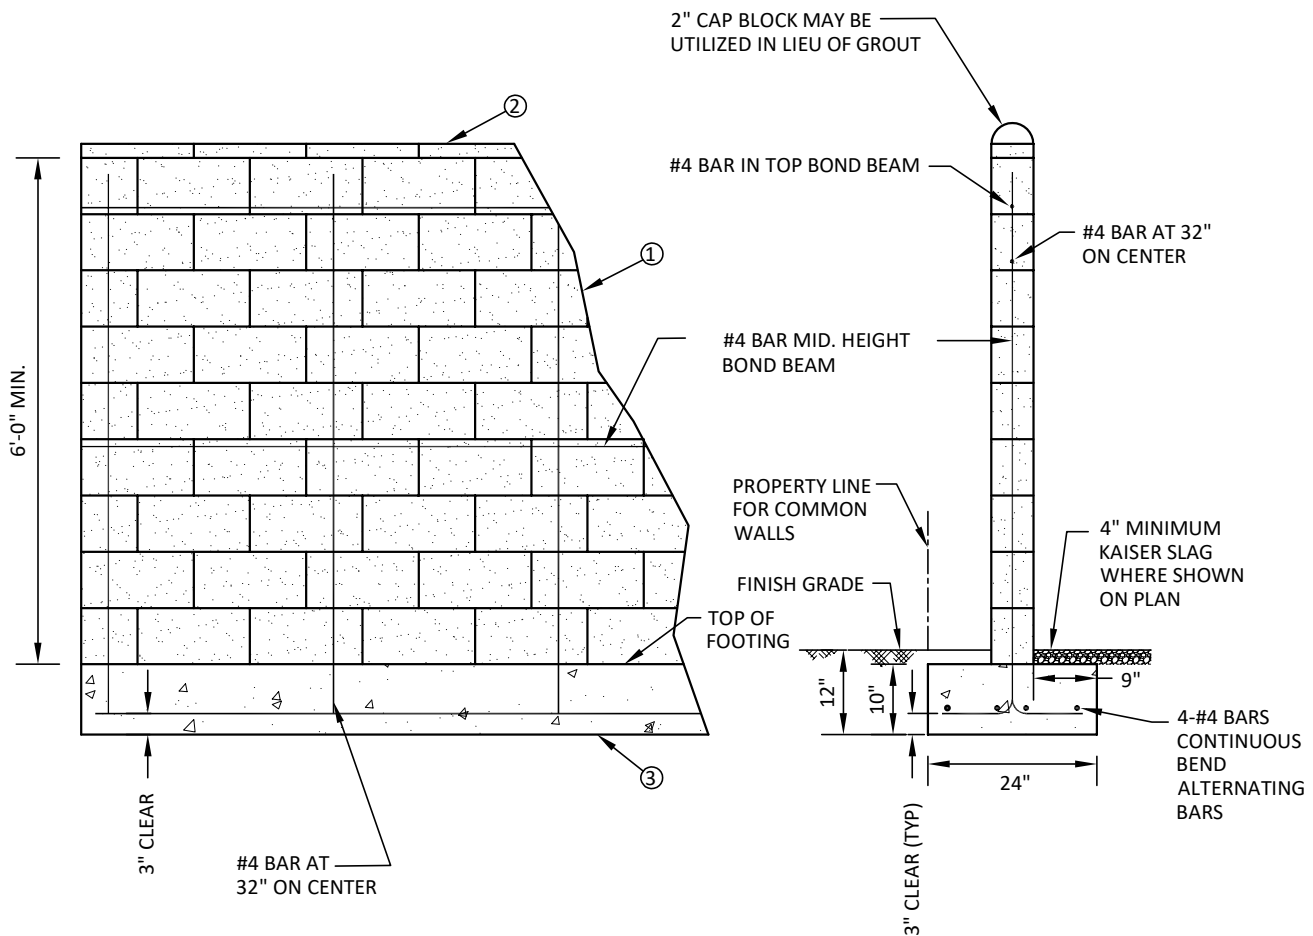

ITEM	DESCRIPTION
①	6"x 8"x 16" SLUMPSTONE CONCRETE BLOCK, LAPAZ COLOR
②	6"x 2"x 16" SLUMPSTONE CONCRETE CAP, LAPAZ COLOR
③	POURED CONCRETE FOOTING (SEE NOTE BELOW)

NOTES:

- ALL CELLS SHALL BE SOLID GROUTED
- CONCRETE IN FOOTING TO BE 3,000 P.S.I. AT 28 DAYS
- GROUT - 1 PART CEMENT, 3 PARTS SAND, 2 PARTS PEA GRAVEL
- MORTAR - 1 PART CEMENT, 1/2 PART LIME PUTTY, 4-1/2 PARTS SAND
- PLASTIC AND MASONRY CEMENT IS NOT ALLOWED PER U.B.C.
- NO REBAR SHALL BE INSTALLED WITHIN 3" OF ANY SUBSURFACE CONCRETE EDGE
- FOOTINGS SHALL BEAR ON COMPETENT UNDISTURBED NATURAL SOIL OR STRUCTURAL BACKFILL. REMOVE ALL LOOSE MATERIAL BEFORE CONCRETE PLACEMENT.

REVISION DATE: 3/31/2011

		SAN BERNARDINO MUNICIPAL WATER DEPARTMENT		DRAWING NUMBER
		CONCRETE MASONRY FENCE DETAIL (NOT TO BE USED FOR RETAINING EARTH)		
D.D.M.	MAR. 11			SBMWD
REVISION	DATE			W6.23
SCALE: NONE		APPROVED		DATE 07/04/2019
		WARREN HUANG, P.E. RCE 49208		